


MaxiTrack

TECHNICAL SPECIFICATIONS

MaxiTrack

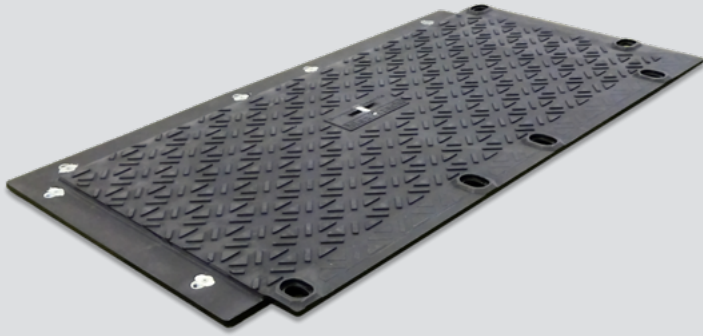

Specifications

- Dimensions:** 1900 x 1000mm (overall)
1800 x 900mm (surface area)
- Thickness:** 25mm (core)
37mm (overall)
- Weight:** 40kg

Deflection Testing

Geosynthetics Soil and Steel Laboratories Ltd conducted a series of deflection tests on various CBR ground conditions. These tests utilised a 300mm diameter steel pressure plate, notably smaller than the footprint of standard construction vehicle tires, to ensure a rigorous and practical evaluation.

This information provides a comprehensive understanding of the performance of our MaxiTrack mats in comparison to our well-established GroundGuards MultiTrack Mats.

It's a testament to our commitment to continuous product development and our dedication to providing reliable, high-quality ground protection solutions for the construction industry.

